

# Quick

*Finessa Series*

110 N · 220 N · 330 N · 331 N  
440 N · 441 N · 550 N



## Quick

Corporation  
of America

P. O. BOX 938

Costa Mesa, Calif. 92627



Quality Product by D·A·M Western Germany




# Quick

Corporation  
of America

P.O. BOX 938  
Costa Mesa, Calif. 92627

■ Congratulations on the purchase of your new Quick Spinning Reel. This reel has been thoroughly engineered and tested under all types of conditions. It will give you years of enjoyable use with sensible care. A few tips on preventive maintenance: rinse with fresh water after use and wipe dry, add a few drops of oil or lubricant spray to areas indicated by small arrows on the reel. Back off drag when stored and not in use. Good luck and good fishing

Quick Corporation

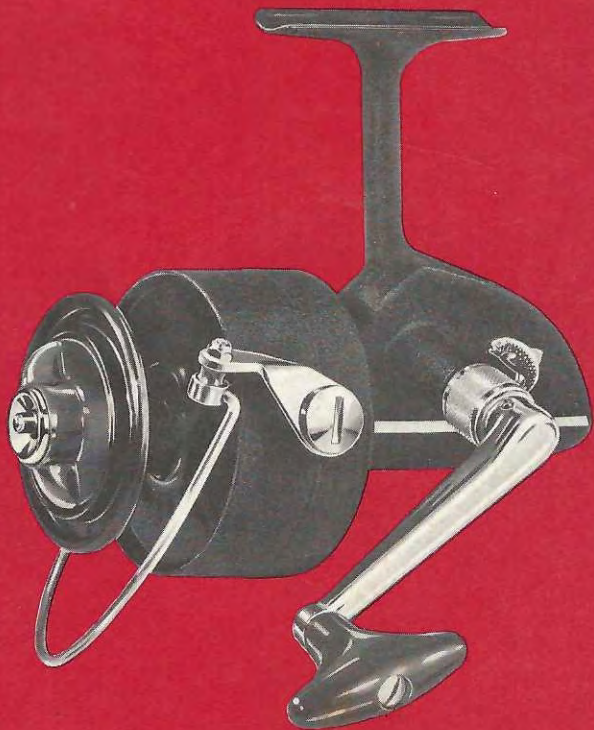

**Just the right reel for every type of fishing**

**Quick 110 N Finessa**

ultra light from the pioneers of light weight fishing.

**Quick 220 N Finessa**

designed for all fresh water fishing and also very light salt water use.

**Quick 330 N Finessa · Quick 331 N Finessa**

Quick 330 N Finessa designed and engineered for heavy duty fresh water fishing and light salt water angling. Ideal for such game fish as muskie, coho, steelhead and bone fish.

Quick 331 N Finessa (high speed) same as the Quick 330 N Finessa in size and weight with the added feature of 5-1 gear ratio for high speed retrieve.



### Quick 440 N Finessa · Quick 441 N Finessa

Quick 440 N Finessa the light heavy weight champion of the spinning world for extra heavy fresh water fishing, also light and medium salt water use.

Quick 441 N Finessa (high speed) same as the Quick 440 N Finessa in size and weight with the added feature of 5-1 gear ratio for high speed retrieve.



### Quick 550 N Finessa

for all heavy duty salt water fishing, particularly popular with surf casters for its large diameter spool, large line capacity, smooth drag and trouble free operation. Special Note: bail release tension adjustment inside of flange for extra tension when casting heavy lures in surf.




# Special technical data of this series

Quick Finessa	Ratio	Retrieve inch.	Weight oz	Line capacity ca. yds shallow/deep													
				2 lbs	4 lbs	6 lbs	8 lbs	10 lbs	12 lbs	15 lbs	20 lbs	25 lbs	30 lbs	40 lbs	50 lbs	60 lbs	
110 N	1:5	20,7"	8,8	160/407	77/209	55/143	40/110	—	—	—	—	—	—	—	—	—	—
220 N	1:3,6	19,7"	11,3	—	—	220/275	165/209	137/176	106/137	—	—	—	—	—	—	—	—
330 N	1:3,6	22,4"	12,4	—	—	—	—	220/385	181/324	143/253	101/176	78/137	—	—	—	—	—
331 N	1:5	30,7"	13,1	like Quick 330 N, but with high speed gear and ambidextrous													
440 N	1:3,6	25,6"	13,4	—	—	—	—	—	—	253/506	198/396	137/275	110/220	77/154	68/124	—	—
441 N	1:5	35,0"	13,8	like Quick 440 N, but with high speed gear and ambidextrous													
550 N	1:3,5	27,2"	19,1	—	—	—	—	—	—	—	—	220/429	176/330	123/231	101/192	72/140	62/121
																55/105	



**New features that fishermen have been asking for on spinning reels**

1. New position of the anti reverse clutch directly on the back side of the flange which allows for fast on and off operation. This means that the torque and stress when striking or playing a large fish is intercepted before it reaches the gear train. This will allow a longer gear life with a smooth and noiseless operation for years.
2. The three stop switching position on the bail release, now the hardness or softness of the bail release can be adjusted depending on the type of fishing encountered.
3. Heat absorbing asbestos incorporates a new drag system for smoother drag operation.

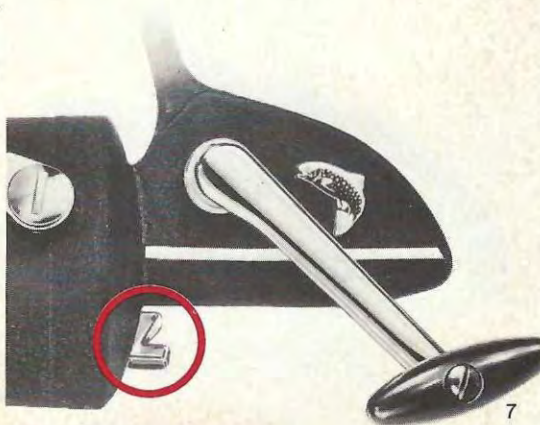


**Main drive** This precision cut sturdy gear is hand machined from phosphor bronze which runs long and silent.

**New drag assembly (brake)** It can be adjusted to an extremely fine setting to any desired tension and incorporates an asbestos material to insure dissipation of heat, the main cause of uneven drags.

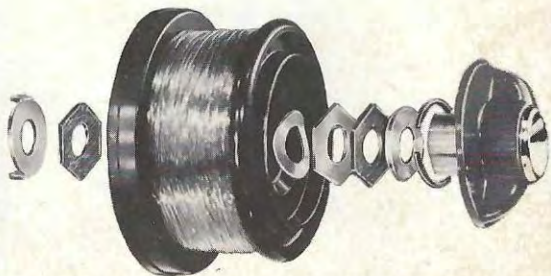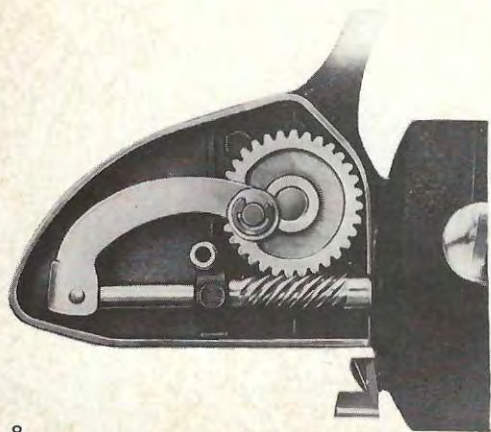

**Other advantages** Precision ball bearing and self lubricating sinter slide bushings. Line guide of corrosion proof hard metal (tungsten carbide). Bail pick-up can be folded against housing, handy store crank.

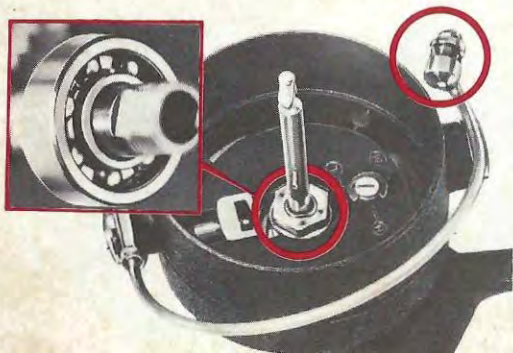


**Adjustment of pick-up release** The reels of the Finessa series are equipped with an additional feature where the release pick-up can be adjusted to heavier or lighter tension by three notches indicated on the back of the flange (picture 1.).

**L** = light: light tripping of flange for smooth casts, i. e., for float or light spin fishing

**M** = medium: medium tripping of flange for normal casts

**H** = hard: hard for surf casting or any fishing where a heavy lure is cast.

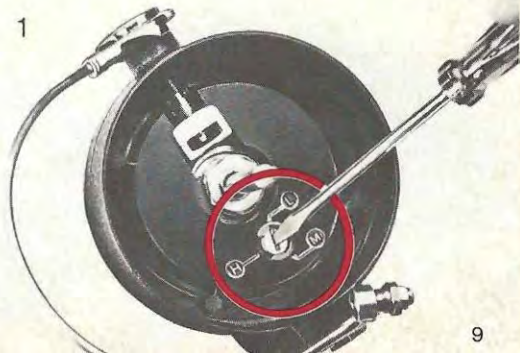

**Folding of bail in order to take care of the bail spring to make it more durable and for transport**


The spring releases and the bail folds down to the housing when the stop slide is pushed down until the angle lever disengages (picture 2).

2



**Folding of the handle** By unscrewing the handle nut (a) the handle can be folded for transport (picture 3).

3

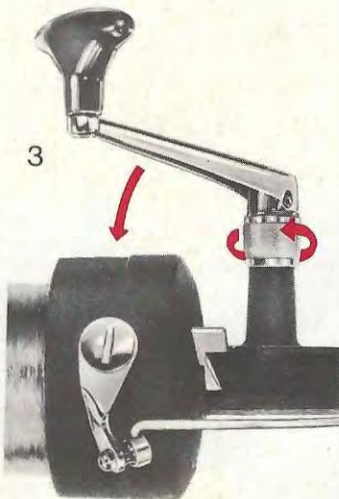

**The reversible anti-reverse clutch**  
The anti-reverse clutch stops the flange from turning back for drift or bottom fishing or any regular lure fishing (picture 4).



4



**Winding of the line** The spool is filled correctly if there is a distance of 2 mm between the line and the front edge of the spool (picture 5). In the event you use extremely thick or thin line you can avoid faulty winding (picture 6-7) by correcting the position of the spool to the line guide i. e., either adding or taking off washers (picture 8). On the back side of the the line spool, there is a space where you can record the diameter of line which has been wound on the spool (picture 9).


**And which line for fishing ?** We recommend **GOLD DAMYL-Line** - the perfect line for "Quick-Fishing". GOLD DAMYL is unaffected by fresh and saltwater and can therefore be left wet on the reel. GOLD DAMYL is available in the following sizes :

Size (inches)	.005	.007	.009	.010	.011	.012	.015
	.017	.020	.022	.026	.028	.030	
Breaking strain (lbs)	2	4	6	8	10	15	
	20	25	30	40	50	60	

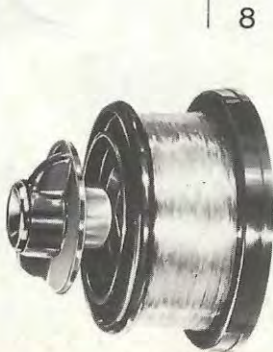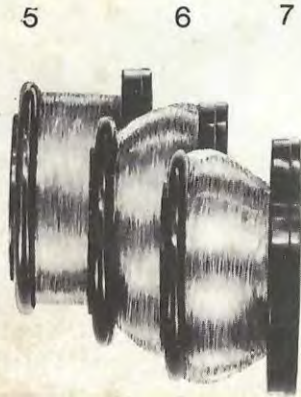

7


8




9




10

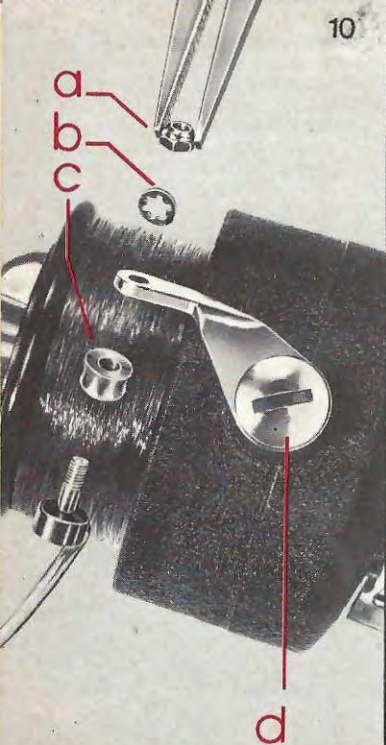

11

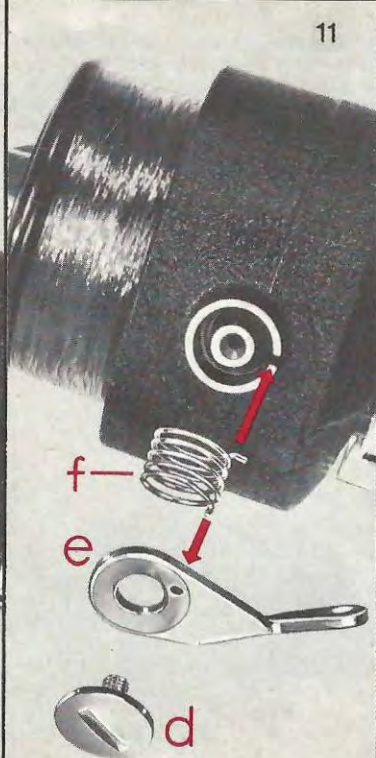


12

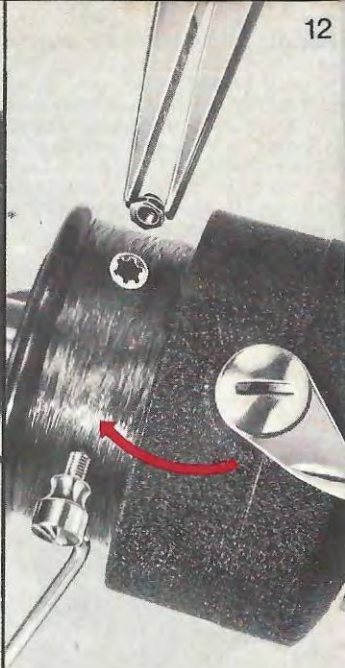


**Changing the spring of line pick-up arm** Unscrew hexagon nut (a) and take off the lock washer (b) and line guide (c) (picture 10). Loosen bearing screw (d) take off angle lever (e) and remove defective spring (f) (picture 11). Place in new spring, put in angle lever (insert upwards pointing end of spring in bore hole) and fasten bearing screw tightly (picture 12). Raise angle lever against spring tension and mount as per picture 10.

**Changing the spool** In changing the spool on the Quick 550 N, loosen the brake nut and then pull the spool off. On all other reels with push button releases, you must push the button down and pull off the spool at the same time (picture 13).

13

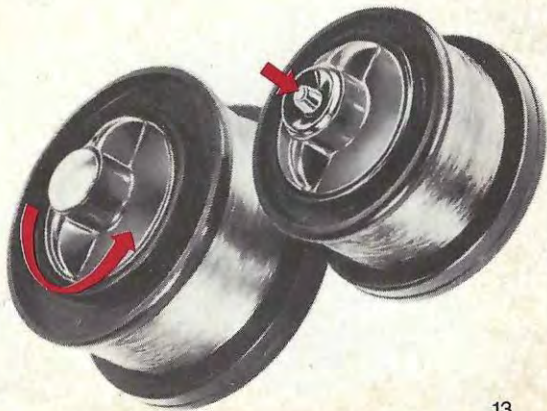


**Adjustment of brake (drag)** The brake (drag) should prevent the line from breaking, by turning the brake nut it can be adjusted in such a way that on a test like shown in picture 14 the drag releases the line before the line can break. The brake procedure can be noticed by the turning of the spool together with the noise of the brake ratchet.

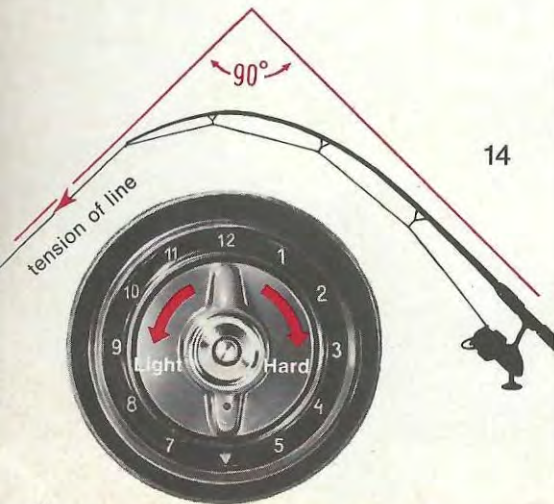


14


**Lubrication** Even the best quality tackle needs a certain amount of care. Lubricate now and then those parts of your reel which are marked by an arrow (picture 15). Lubricating will add to the life of your reel.

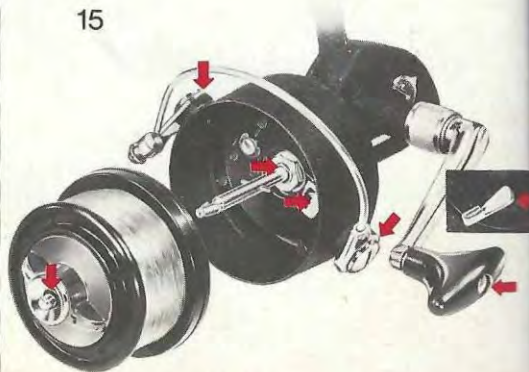


15




**The over-head cast with a fixed-spool reel** Hold the rod handle with the right hand, the reel downwards, while the stem of the reel is between the third and fourth finger. Pay attention to the bait, hanging 2 or 3 inches from the rod tip and hold the line with the right forefinger. Now, open the bail with left hand. The line is now ready for casting. Lift the rod over your shoulder to a vertical position and then swing rod forward quickly. In the moment of throw, release the line so that the bait can fly off. On rewinding the bait or on landing the fish, hold the rod about 60° over horizontal. It can also be casted laterally.

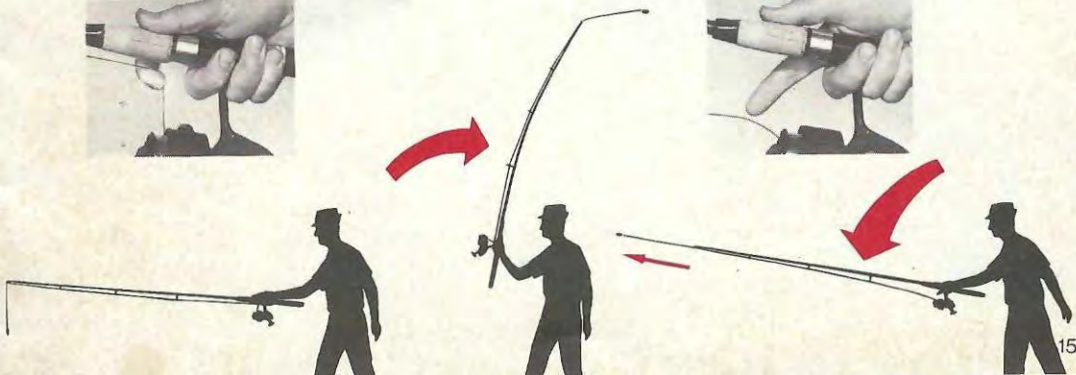

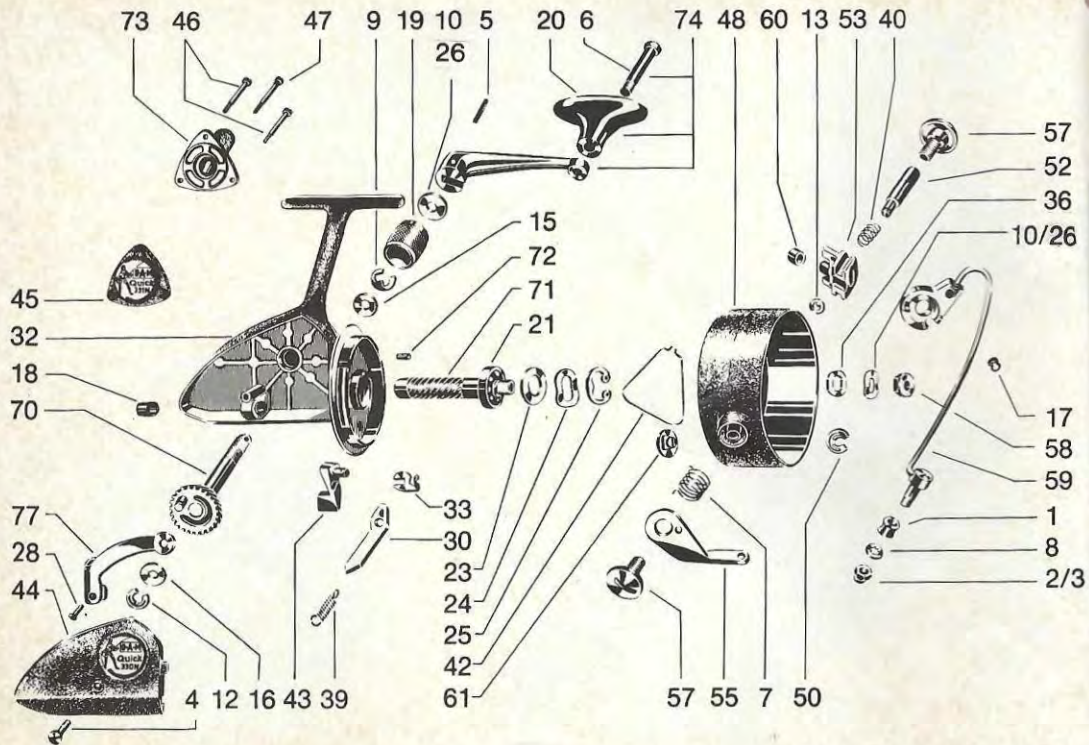


**Hint:** When ordering a spare part please insure that you quote the correct order number for your type of reel.

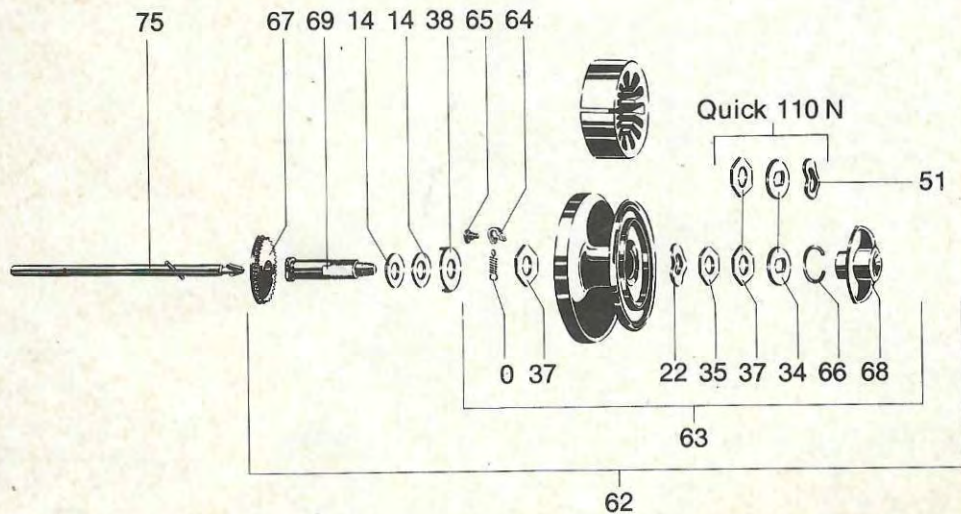

[illegible]

Fig. No.	Part No.	Technical Descript. of Spare Parts	110N	220N	330N	440N	550N	331N	441N																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
----------	----------	------------------------------------	------	------	------	------	------	------	------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

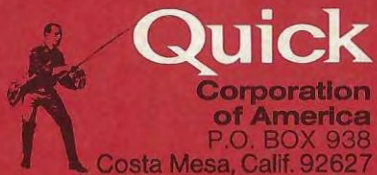

# GUARANTEE

This **Quick** Spinning Reel is guaranteed to be free from defects in material and workmanship not resulting from misuse or abuse. We will repair the reel or replace defective parts which may thus develop during a period of one year from date of sale to the original purchaser, at our option.

6102/774

Quality Product by **D·A·M** Western Germany